



Tru-Dual®

Series 1510TDSS16

Bell Restraint Harness for Ductile Iron & C900 PVC Pipe
Split Serrated Restraint Ring on Both Sides of the Bell

CONTAINS BOTH DOMESTIC AND IMPORTED HARDWARE

Installation Instructions


1. The Series 1500TD is designed for restraining Ductile Iron pipe or C900 PVC pipe at push-on joints. It has a serrated split restraint ring with heat treated inserts on the spigot and behind the bell.

All EBAA products intended for installation on ductile iron pipe are designed for and limited to use on ductile iron pipes that comply with the requirements of ANSI/AWWA C151/A21.51 and have a Brinell Hardness or equivalent measurement value that does not exceed 230BHN. **These requirements apply to the entire pipe wall profile at all restraining wedge engagement points and to the full penetration depth of each restraining wedge.***

- Assemble the push-on joint per the pipe manufacturer's instructions.
- Install both halves of one of the serrated rings around the pipe behind the bell, tapping each half into place. Make sure that the complete ID of the ring is touching the pipe before installing the side bolts. Install the side bolts and tighten evenly to 60 ft-lbs torque (110 ft-lbs on 8 inch, 10 inch and 12 inch).
- Remove the side bolts from the second serrated restraint ring. Use the tie bolts to determine the proper location of the restraint ring on the spigot. Allow enough room on the tie bolt to fully engage the nuts.
- Install both halves of the restraint ring at the proper location, tapping each half into place. Make sure that the complete ID of the ring is touching the pipe before installing the side bolts. Tighten the side bolts evenly to 60 ft-lbs torque (110 ft-lbs on 8 inch, 10 inch and 12 inch).
- Place nuts on the tie bolts and tighten until they are snug. Allow enough room on the tie bolt to fully engage the nut with several threads showing. Do not tighten these bolts enough to force the spigot further into the bell of the joint.

*To learn more about this addendum, please visit: <https://ebaa.com/spec/dip>

APPROXIMATE SHIPPING WEIGHT: 57.42 lbs.

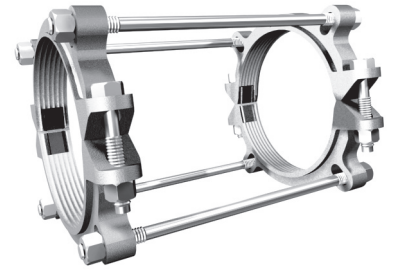

CONTENTS

Qty.	Description
2	10 in. 1500TDR Restraint Rings
4	3/4 in. by 22 in. Stainless Steel Tie\ Rods w/ Nuts

Restraints Made in The USA

For use on water or wastewater pipelines subject to hydrostatic pressure and tested in accordance with either AWWA C600 or ASTM D2774

Copyright 2023 © EBAA IRON, Inc. All Rights Reserved

Series 1510TDSS16

Bell Restraint Harness for Ductile Iron & C900 PVC Pipe
Split Serrated Restraint Ring on Both Sides of the Bell



1 5 1 0 T D S S 1 6

EBAA IRON SALES, Inc.

P.O. Box 857, Eastland, TX 76448

Tel: (254) 629-1731


Fax: (254) 629-8931

Toll: (800) 433-1716

contact@ebaa.com

www.ebaa.com

Made in the USA

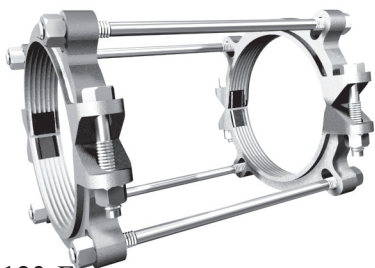

1123-F